






MAGNETIC FLEX: CURVES & STRAIGHT TRACKS


LFC/039, LFC/040, LFC/041



LFC/044, LFC/045, LFC/046



IRP's UH-NYLON & U-HDPE
Straight & Curves
are strongly
recommended

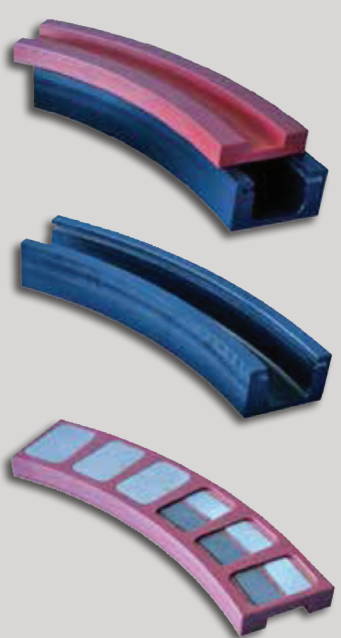

Code	Number of Tracks	1 (mm)	1 (mm)	1 (mm)	1 (mm)	1 (mm)	1 (mm)
	Degree of Bend	Width	Width	Width	Width	Width	Width
MAGNETIC FLEX CURVES FOR 3.25" 2540 SERIES							
IRP. 10.3.3.15-K325-30	30°	100	185	270	355	440	525
IRP. 10.3.3.15-K325-45	45°	100	185	270	355	440	525
IRP. 10.3.3.15-K325-90	90°	100	185	270	355	440	525

MAGNETIC FLEX CURVES FOR 4.5" 2540 SERIES							
IRP. 10.3.3.15-K450-30	30°	129	249	369	489	-	-
IRP. 10.3.3.15-K450-45	45°	129	249	369	489	-	-
IRP. 10.3.3.15-K450-90	90°	129	249	369	489	-	-

Code	Chain Type	Radius R	Pitch P	Basic Width B	Infeed Length L	Total Height H
		mm	mm	mm	mm	mm
FOR CHAINS WITH 3.25"/3.30" PLATE WIDTH						
IRP. 10.0.3.15-K325-90	Steel/Plastic	500	85	100	0	82/90
					100	90
				111	100	90
					100	100
		500	89	100	125	82
				100	100	82
		500	90	110	0	82
				590	180	100
		680	-	100	100	82
				750	85	111
860	-	100	125	82		
		1000	-	100	0	82
1000	-	85	111	100	90	
		85	111	100	100	100

FOR CHAINS WITH 4.5" PLATE WIDTH						
IRP. 10.3.3.5-K450-90	Steel/Plastic	500	120	129	125	90
		610	120	129	125	90

FOR CHAINS WITH 7.5" PLATE WIDTH						
IRP. 10.0.3.15-K325-90	Steel	610	196	214	125	90
		860	-	214	0	82
		1000	-	214	0	82
	Steel/Plastic	610	195	200	100	95
		860	-	214	0	87


FOR CHAINS WITH 10.5" PLATE WIDTH						
IRP. 10.0.3.15-K325-90	Plastic	860	-	290	0	87

FOR CHAINS WITH 12.0" PLATE WIDTH						
IRP. 10.0.3.15-K325-90	Plastic	860	-	340	0	87

TAB CURVES




LFC/036, LFC/037, LFC/ 038



Tab width and height is the same as standard plastic & stainless steel tab slat chain and can be directly interchanged without changing guides or bends

LFC/047, LFC/048, LFC/ 049



Tab width and height is the same as standard plastic & stainless steel tab slat chain and can be directly interchanged without changing guides or bends

Code	Number of Tracks	1 (mm)	1 (mm)	1 (mm)	Pitch E	Basic Width B	Radius R
	Degree of Bend	Width	Width	Width	mm	mm	mm
TAB CURVE FOR 3.25" 2540 SERIES							
IRP. 10.0.5.5 K325 - 30	30°	100	190	280	90	100	500
IRP. 10.0.5.5 K325 - 45	45°	100	190	280	90	100	500
IRP. 10.0.5.5 K325 - 90	90°	100	190	280	90	100	500

TAB CURVE FOR 3.25" 2540 SERIES							
IRP. 10.0.5.5 K450 - 30	30°	125	245	365	120	125	610
IRP. 10.0.5.5 K450 - 45	45°	125	245	365	120	125	610
IRP. 10.0.5.5 K450 - 90	90°	125	245	365	120	125	610

TAB CURVE FOR 3.25" 2540 SERIES							
IRP. 10.0.5.5 K750 - 30	30°	200	395	590	195	200	610
IRP. 10.0.5.5 K750 - 45	45°	200	395	590	195	200	610
IRP. 10.0.5.5 K750 - 90	90°	200	395	590	195	200	610



IRP's UH-NYLON & U-HDPE
Straight & Curves
are strongly
recommended

